BRONZE Y-TYPE STRAINER

PN20 F7G20


FEATURES & SPECIFICATIONS

- Y-Pattern body
- Threaded cap
- Stainless steel mesh
- Threaded to EN 10226-1 (ISO 7)
- Applicable for Building Services, Air-Conditioning, Fire Protection, Cold Water Plumbing, Hot Water System, General Industries.



PRESSURE & TEMPERATURE RATINGS

Working Pressure	20bar WOG Non-Shock 10bar Saturated Steam
Testing Pressure (x1.5)	30bar Hydrostatic
Working Temperature	-10°C ... 170°C
Suitable Media	Water, Oil & Gas

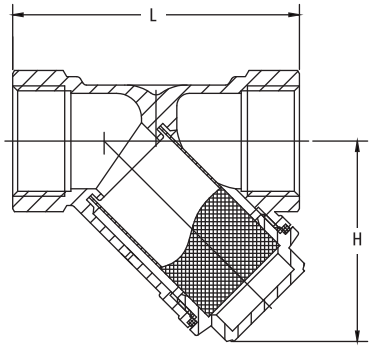

MATERIAL SPECIFICATIONS

Part	Material	Specification
Body	Bronze	EN 1982 GC490K
Cap	Bronze	EN 1982 GC490K
Screen	Stainless Steel 304	EN 1449 304S31
Gasket	PTFE	

DIMENSIONS

(mm)

DN (mm) / (inch)	15 / ½	20 / ¾	25 / 1	32 / 1¼	40 / 1½	50 / 2
L	58.5	70.5	88	96.5	107	126
H	41	50	59	69	76	96

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.