DZR BRASS Y-TYPE STRAINER

PN16 F7Z16


FEATURES & SPECIFICATIONS

- Y-Pattern body
- Threaded cap
- Stainless steel mesh
- Dezincification (DZR) copper alloy body and cap
- Threaded to EN 10226-1 (ISO 7)
- Applicable for Building Services, Air-Conditioning, Fire Protection, Cold Water Plumbing, Hot Water System, General Industries.



PRESSURE & TEMPERATURE RATINGS

Working Pressure	16bar WOG Non-Shock 8.6bar Saturated Steam
Testing Pressure (x1.5)	24bar Hydrostatic
Working Temperature	-10°C ... 170°C
Suitable Media	Water, Oil & Gas

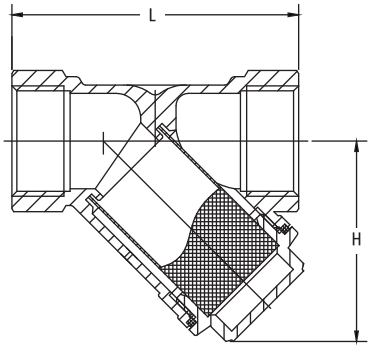

MATERIAL SPECIFICATIONS

Part	Material	Specification
Body	DZR Brass	EN 12165 CW602N
Cap	DZR Brass	EN 12165 CW602N
Screen	Stainless Steel 304	EN 1449 304S31
Gasket	Non-Asbestos	

DIMENSIONS

(mm)

DN (mm)	15	20	25	32	40	50	65	80	100
DN (inch)	½	¾	1	1¼	1½	2	2½	3	4
L	56	69	82	90	101	123	176	201	250
H	41	48	58	66	74	92	136	146	189

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.