BRASS FIRE DEPARTMENT CONNECTIONS

300PSI Fig No.: FBFCS

FEATURES & SPECIFICATIONS

- Straight body design
- K-factor 5.6
- Connection : 4" x 2½" x 2½" (DN100 x DN65 x DN65), NPT or BSPT
- 2½" pin lug swivels for ease of operation
- Designed in accordance with UL405
- Caps, chain and base plate available upon request
- Working pressure : 300psi

UL LISTED

FM APPROVED





MATERIALS LIST

Name	Material
Body	Brass
Ball bearing	Stainless Steel 304
Coupling	Brass
Washer	EPDM
Screw	Brass
Henge pin	Brass
O-ring	EPDM
Clapper	Brass
Key-ring	Stainless Steel 304
Cap + Chain	Brass
Base plate	Brass

DIMENSIONS (mm)

Size	4" x 2½" x 2½"
H	143.6
L	211.34
D	100
D1	65
D2	65
A	Ø248.5
A1	Ø236
A2	Ø128.5
A3	Ø116.6
B1	6
B2	4.2

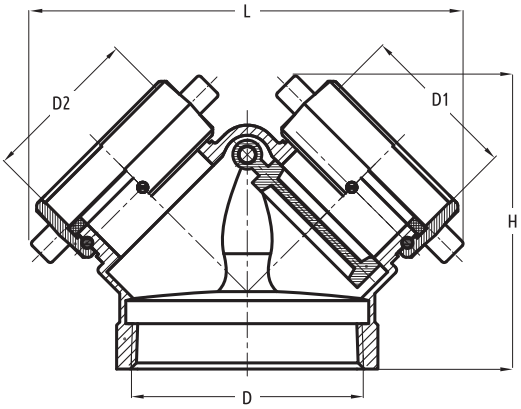

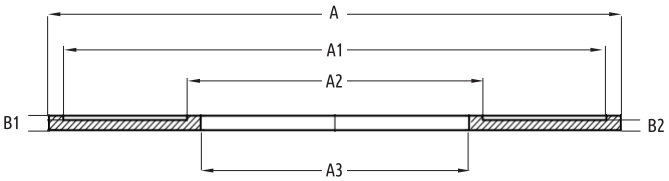

Base Plate

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.