FIRERISER WET BARREL FIRE HYDRANT

250PSI Fig No.: FV-WBH

FEATURES

- Complies with AWWA C503
- Working pressure : 250psi
- Working temperature : -10°C ... 120°C

UL LISTED

FM APPROVED


CONSTRUCTION

- One pumper nozzle 4.5-4NH threaded or 4-4NH threaded, two hose nozzles 2.5-7.5NH threaded
- The quantities for pumper nozzle and hose nozzles can be chosen
- Internal and external polyester coating to RAL3002
- Flange drilled to ANSI B16.1 Class 125 / EN1092-2 PN16
- Available in Monitor Flange Style



MATERIALS LIST

Name	Material
Body	A536 65-45-12
Steel Wire Rope	SS304
O-ring	EPDM
Pumper Nozzle Cap	A536 65-45-12
Pumper Nozzle	C84400
Pumper Nozzle Gasket	EPDM
Gland	CF8
Hex Socket Set Screws	A2-70
Disc Sealing Ring	EPDM
Disc	CF8
Shaft	SS304 / SS420
Fasten Nut	CF8
Shaft Nut	C84400
Operating Nut	CF8
Hex Nut	A2-70
Hose Nozzle Cap	A536 65-45-12
Hose Nozzle	C84400
Hose Nozzle Gasket	EPDM

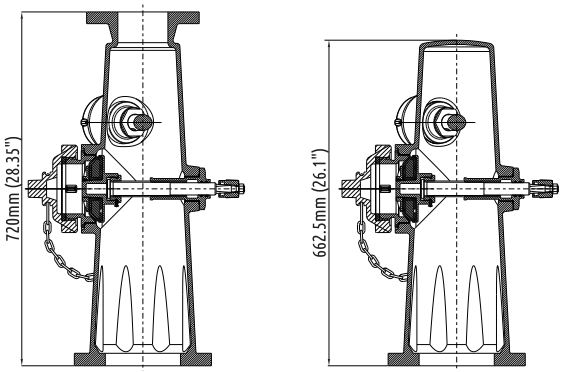

MODEL OPTIONS

Model No.	Hose Nozzle	Pumper Nozzle	Monitor Flange	Lower Flange
FV-WBH-2H0P	2½" *2	--	--	6"
FV-WBH-2H0PM	2½" *2	--	4"	6"
FV-WBH-1H1P	2½" *1	4" or 4½" Pumper Connection *1	--	6"
FV-WBH-1H1PM	2½" *1	4" or 4½" Pumper Connection *1	4"	6"
FV-WBH-2H1P	2½" *2	4" or 4½" Pumper Connection *1	--	6"
FV-WBH-2H1PM	2½" *2	4" or 4½" Pumper Connection *1	4"	6"

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.