
HIGHRISER SWING CHECK VALVE RESILIENT SEATED FLANGED ENDS

365PSI Fig No.: 5201-365-FLA


FEATURES & SPECIFICATIONS

- Swing type
- Valve conforms to AWWA C508, clear waterway
- Fusion bonded epoxy coated RAL3002
- Flange drilled to ANSI B16.1 Class 125 / ANSI B16.42 Class 150 / ANSI B16.1 Class 250 / EN1092-2 PN16 / BS10 Table D / Table E
- Working pressure : 365psi
- Working temperature : 0°C ... 80°C

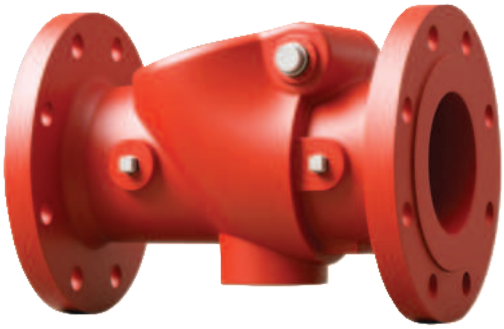

MATERIALS LIST

Name	Material
Body	Ductile Iron A536 65-45-12
Clapper	Ductile Iron A536 65-45-12
Seat	Bronze ASTM C83600
Disc Sealing Ring	EPDM
Shaft	Stainless Steel AISI 304
Pressing Plate	Stainless Steel AISI 304

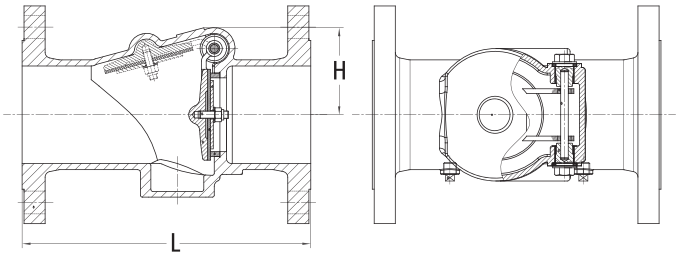

DIMENSIONS (inch/mm)

Size	2”/50	2.5”/65	3”/80	4”/100	5”/125	6”/150	8”/200	10”/250	12”/300
L	8/203	8.7/222	9.5/241	12/305	14/356	15.5/394	18/457	21/533	24/610
H	3/80	3.3/85	3.7/93	4/108	4.7/121	7.8/199	9.2/233	10.8/274	12/306

NET WEIGHT (kg) & CRATE QTY (pcs)

Size	2”/50	2.5”/65	3”/80	4”/100	5”/125	6”/150	8”/200	10”/250	12”/300
N.W.	12.00	17.50	22.00	34.00	58.00	67.30	120.00	174.00	246.00
Crate Qty	30	20	20	12	8	6	6	2	2

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.