FIREFLY BRONZE OS&Y GATE VALVE THREADED ENDS

175PSI Fig No.: BGV


FEATURES & SPECIFICATIONS


- Threaded ends : NPT or BSPT
- Working pressure : 175psi




MATERIALS LIST

No.	Name	Material
1	Body	Bronze ASTM C83600
2	Bonnet	Bronze ASTM C83600
3	Stem	Brass
4	Handwheel	Cast Iron
5	Packing Gland	Bronze ASTM C83600
6	Disc	Bronze ASTM C83600
7	Disc Pin	SS304
8	Gland Packing	Graphite
9	Stud	Steel
10	Yoke Bushing	Brass
11	Set Screw	Steel

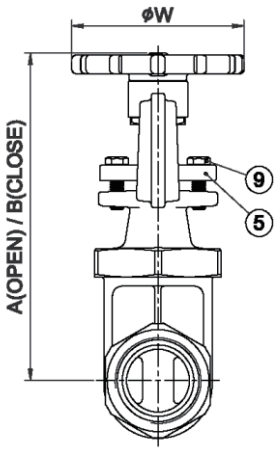

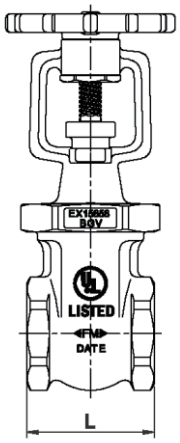

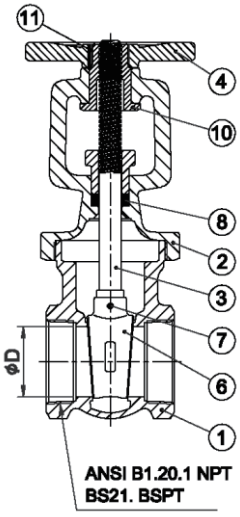

DIMENSIONS (mm)

Size	A±3	B±3	L±0.5	D	W±3
0.75"/20	173	145.5	59	20	80
1"/25	196.5	163	69	25	80
1.25"/32	220.5	181.5	75	32	80
1.5"/40	243	197	82	37.5	100
2"/50	282	227	90.5	50	120

NET WEIGHT (kg) & CRATE QTY (pcs)

Size	Net Weight	Crate Qty
0.75"/20	1.40	18
1"/25	1.80	16
1.25"/32	2.48	12
1.5"/40	3.24	8
2"/50	4.73	6

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.