
FIRERISER GATE VALVE NRS TYPE FLANGED ENDS

200PSI / 250PSI Fig No.: 3288-L-200-FLA / 3288-L-250-FLA

FEATURES & SPECIFICATIONS

- Non-rising stem
- Stainless steel stem
- Valve conforms to AWWA C515
- Fusion bonded epoxy coated interior and exterior RAL3002
- Flange drilled to ANSI B16.1 Class 125 / ANSI B16.5 Class 150 / EN1092-2 PN16 / BS10 Table D / Table E
- Working pressure : 250psi for DN350 / DN400 / DN450, 200psi for DN500 / DN600
- Working temperature : -10°C ... 120°C
- All valves provided with 2" (50mm) operating nut



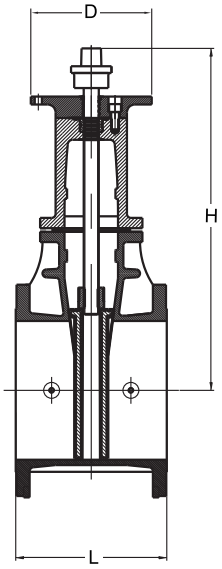

MATERIALS LIST

Name	Material
Body	Ductile Iron ASTM A536 65-45-12
Wedge Disc	Ductile Iron ASTM A536 65-45-12 + EPDM
Disc Nut	ASTM B62 C83600
Stem	Stainless Steel AISI 431
Gasket	EPDM
Bonnet	Ductile Iron ASTM A536 65-45-12
Thrust Collar	Bronze ASTM B62
Gland	Ductile Iron ASTM A536 65-45-12
Wrench Nut	Ductile Iron ASTM A536 65-45-12
Post Plate	Ductile Iron ASTM A536 65-45-12

DIMENSIONS (inch/mm)

Size	14"/350	16"/400	18"/450	20"/500	24"/600
L	15.00/381	15.98/406	17.01/432	17.99/457	20.00/508
H	33.94/862	36.93/938	41.61/1057	44.96/1142	50.98/1295
D	12.01/305	12.01/305	12.01/305	12.01/305	12.01/305

NET WEIGHT (kg) & CRATE QTY (pcs)

Size	14"/350	16"/400	18"/450	20"/500	24"/600
N.W.	232.00	308.00	446.00	636.00	848.00
Crate Qty	1	1	1	1	1

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.