
SOLENOID CONTROL VALVE

PN16 F6316-FSC
PN25 F6325-FSC

FEATURES & SPECIFICATIONS

- Energized to open or close the valve
- Full bore globe pattern design for superior control characteristic
- Nylon reinforced diaphragm for long-lasting performance
- Durable fusion bonded epoxy coated
- Design comply with EN 1074 -5
- Flange drilled to EN 1092-2 PN16 / EN 1092-2 PN25 / ANSI Class 150 (Specify on order)



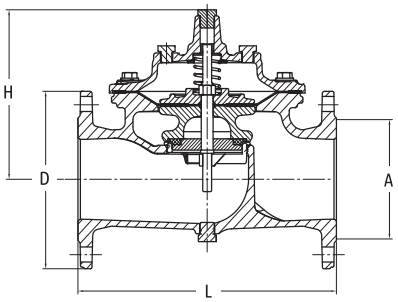

PRESSURE & TEMPERATURE RATINGS

Working Pressure	16bar	25bar
Shell Test Pressure (x1.5)	24bar	37.5bar
Seat Test Pressure (x1.1)	17.6bar	27.5bar
Working Temperature	-20°C ... 110°C (EPDM) -10°C ... 80°C (NBR)	
Suitable Media	Water	
Setting Range	1 ... 12bar	

MATERIAL SPECIFICATIONS

Part	Material	Specification	Part	Material	Specification
Body	Ductile Iron	EN-JS 1050	Seat Retainer	Stainless Steel 304	EN 10088-3 1.4301
Bonnet	Ductile Iron	EN-JS 1050	Spring	Stainless Steel 304	EN 10088-3 1.4301
Plug	Stainless Steel 304	EN 10088-3 1.4301	Diaphragm	Nylon Reinforced Rubber	EPDM + Nylon Fabric
Stem	Stainless Steel 304	EN 10088-3 1.4301	Seal Ring	Rubber	EPDM
Seat	Stainless Steel 304	EN 10088-3 1.4301	O-Ring	Rubber	NBR

DIMENSIONS

(mm)

DN (mm)	50	65	80	100	125	150	200	250	300	350	400	450	500	600
DN (inch)	2	2½	3	4	5	6	8	10	12	14	16	18	20	24
L	230	290	310	350	400	480	600	730	850	980	1100	1200	1250	1450
H	165	195	225	230	240	240	430	545	605	550	710	720	825	885
D	165	185	200	220	250	285	340	405	460	520	580	640	715	840
A	99	118	132	156	184	211	266	319	370	429	480	548	609	720


Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.

SOLENOID CONTROL VALVE

PN16 F6316-FSC
PN25 F6325-FSC

SOLENOID VALVE SPECIFICATION


Medium Temperature	-5°C ... 80°C (NBR Sealing)
Working Pressure	0 ... 8bar
Working Voltage	AC220V ... AC240V, AC110V 50/60Hz 22VA, DC24/12V 13W
Protection	IP65
Motor	H Degree
Working Type	Semi direct acting
Body Material	Brass / Stainless Steel 316
Seal Material	NBR (Options EPDM, Viton)
Interface Thread	G type / NPT




NORMALLY-CLOSED AND NORMALLY-OPENED DIAGRAM

Note : Please indicate Normally-Closed or Normally-Opened while placing the order.

Normally-Closed Valve




Energized
Valve Open




De-energized
Valve Close

Normally-Opened Valve




Energized
Valve Close




De-energized
Valve Open

VALVE COMPOSITION

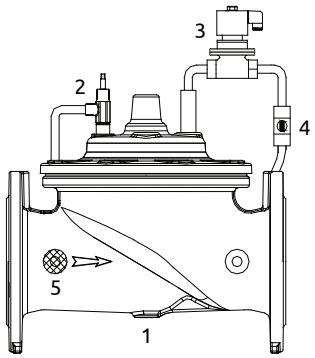

1	Main Valve
2	Needle Valve
3	Solenoid Valve
4	Ball Valve
5	Strainer

TYPICAL CONNECTION

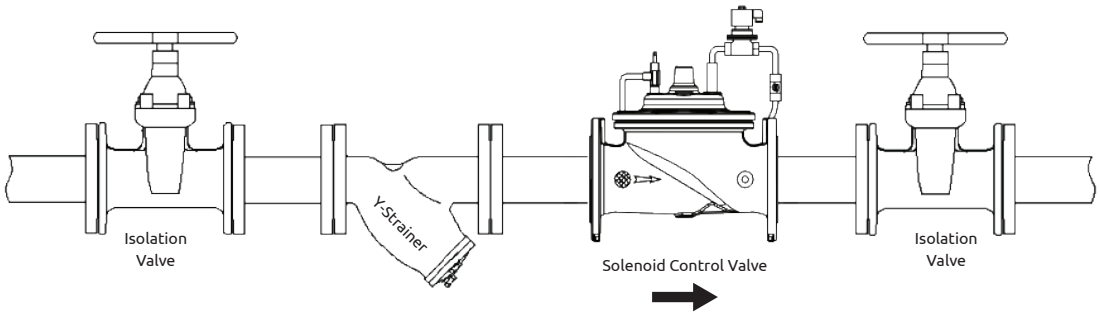

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.