BRONZE RISING STEM GLOBE VALVE

PN20 F3G20R

FEATURES & SPECIFICATIONS

- Threaded bonnet
- Swivel disc
- Rising stem
- Threaded to BS EN 10226-1 (ISO 7)
- Applicable for Building Services, Air-Conditioning, Fire-Protection, Cold Water Plumbing, Hot Water System, General Industries




PRESSURE & TEMPERATURE RATINGS

Working Pressure	20bar WOG Non-Shock 10bar Saturated Steam
Shell Test Pressure (x1.5)	30bar Hydrostatic
Seat Test Pressure (x1.1)	22bar Hydrostatic 5.5bar Air
Working Temperature	-10°C ... 170°C
Suitable Media	Water, Oil & Gas

MATERIAL SPECIFICATIONS

Part	Material	Specification
Body	Bronze	EN 1982 GC CC491K
Bonnet	Bronze	EN 1982 GC CC491K
Disc	Brass (DN15 ... DN25)	EN 12165 CW602N
	Bronze (DN32 ... DN50)	EN 1982 GC CC491K
Stem	Brass	EN 12165 CW617N
Packing	PTFE	
Packing Nut	Brass Rod	EN 12165 CW617N
Gland	Aluminium	
Handwheel	Brass Rod	EN 12165 CW617N
Gasket	Non-Asbestos	

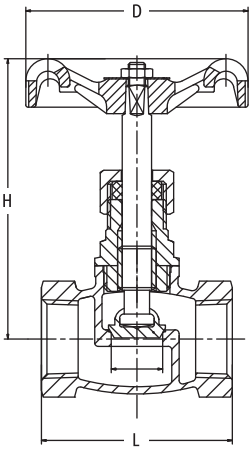

DIMENSIONS

(mm)

DN (mm)	15	20	25	32	40	50
DN (inch)	½	¾	1	1¼	1½	2
L	49	56	66	74	85	100
H	71	73	87	95	110	124
D	50	56	63	70	80	92

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.