BRASS FIRE HOSE VALVE

300PSI Fig No.: FBHV

FEATURES & SPECIFICATIONS

- Designed for fire hose rack assembly
- Inlet : Female NPT
- Outlet : Female NPT / Male hose thread
- Working pressure : 300psi


UL LISTED

FM APPROVED

MATERIALS LIST

Name	Material
Body	Brass
Nut	Brass
Washer	Stainless Steel 304
Seat Seal	EPDM
Holder	Brass
Set Screw	Stainless Steel 304
Lock Nut	Brass
O-ring	EPDM
Bonnet	Brass
Stem	Brass
Lock nut	Brass
O-ring	EPDM
Handle wheel	Aluminum Alloy
Wheel washer	Stainless Steel 304
Wheel nut	Brass



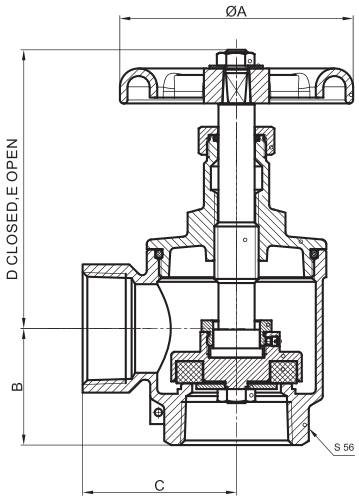

DIMENSIONS (mm)

Size	1½"x1½"/40x40	2½"x2½"/65x65
A	100	127
B	50	68
C	63	79
D	119	157
E	145	200

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.