
FIREFLY BRONZE BUTTERFLY VALVE THREADED ENDS

300PSI Fig No.: BBT-300

FEATURES & SPECIFICATIONS

- Factory installed UL listed double tamper switches
- Valve approved for indoor and outdoor use
- Threaded : NPT or BSPT
- Working pressure : 300psi
  Max. Test Pressure : 600psi
- Max. working temperature : 250°F (120°C)

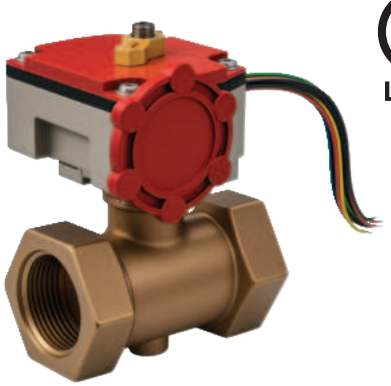


UL LISTED

FM APPROVED

MATERIALS LIST

Name	Material
Body	Bronze C836000
Disc	Stainless Steel AISI304
Handwheel	WCB
Seat	Viton
Indicator	Powder Metal
Housing	Forged Brass

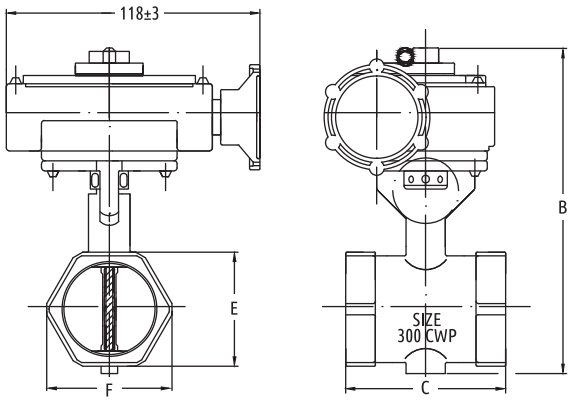

DIMENSIONS (mm)

Size	1"/25	1.25"/32	1.5"/40	2"/50	2.5"/65
B	129	137.9	145.9	159.8	175.5
C	54	66.7	73	82.6	114
E	39.7	49.2	55.6	70	86.5
F	44.5	55	60.3	79	96

NET WEIGHT (kg) & CRATE QTY (pcs)

Size	1"/25	1.25"/32	1.5"/40	2"/50	2.5"/65
N.W.	1.55	1.71	1.83	2.35	3.38
Crate Qty	6	6	6	6	6

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.