BRASS PRESSURE REDUCING DEVICE

175PSI

Fig No.: FBPR / FBPRB


FEATURES & SPECIFICATIONS

- Pressure reducing device angle valve with locking device
- Rated adjustable restriction of resident pressure up to 175psi
- Pin may be removed manually to allow full opening of valve
- Inlet : Female NPT
- Outlet : Female NPT / Male hose thread
- Working pressure : 175psi



MATERIALS LIST

Name	Material
Body	Brass
Nut	Brass
Washer	Stainless Steel 304
Seat Seal	EPDM
Holder	Brass
Set screw	Stainless Steel 304
Lock nut	Brass
Bonnet	Brass
Stem	Brass
O-ring	EPDM
Lock nut	Brass
Handle wheel	Aluminum Alloy
Wheel washer	Stainless Steel 304
Wheel nut	Brass
Collar	Brass
Washer	Nylon 6
Set screw	Stainless Steel 304
Set numbers	Brass
Wire	Stainless Steel 304

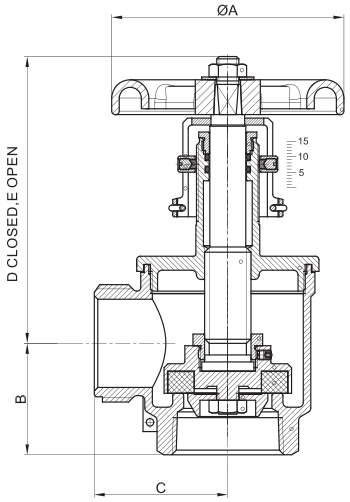

DIMENSIONS (mm)

Model No.	FBPR	FBPRB
Size	1½"x1½"/40x40	2½"x2½"/65x65
A	100	127
B	48	67
C	58	77
D	123	165
E	145	206

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.
Images are for illustrative purposes only. Refer to local sales representatives for detail catalogues, technical data and specifications.